


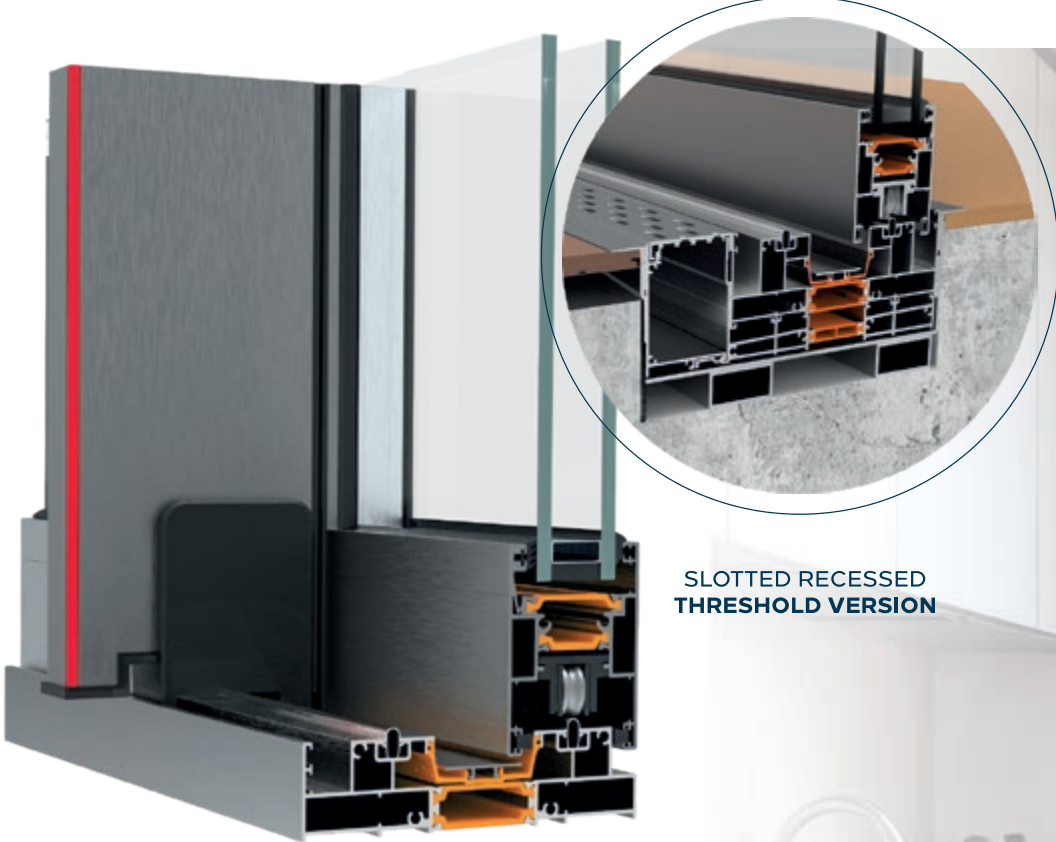

SLOTTED RECESSED
THRESHOLD VERSION

APPLICATION FEATURES	
AIR WATER INSULATION AND ENERGY SAVING	✓
WIDER, HIGHER SLIDES	✓
HIGH CORROSION RESISTANCE	✓
PROBLEM-FREE MECHANICAL SOLUTIONS	✓
FLYSCREEN	✓
FIXED AND MOVABLE SASH	✓

TECHNICAL SPECIFICATIONS	
SASH LENGTH	124 mm
FRAME LENGTH	33 mm
SASH WIDTH	52 mm
THE MIDDLE SASH WIDTH	32 mm
MAX. GLASS THICKNESS	30 - 33 mm
SASH CARRYING CAPACITY	200 kg

- **Enhanced Durability and Smooth Operation**
Thanks to a stainless steel rail and specially engineered bearings, the system ensures long-lasting performance and effortless movement.
- **Fully Integrated Fly Screen Design**
Fly screens are seamlessly integrated into all sash profiles, providing insect protection without compromising aesthetics or functionality.
- **Modern Aesthetics with Metallic Touch**
The system features anodized surfaces in a sophisticated silver bronze finish, reflecting the modern appeal of high-end aluminum architecture.
- **Custom Surface Finishes with Unique Effects**
GLR36 offers powder coating and wood texture options, enabling original design concepts with a natural or industrial look.
- **Superior Corrosion and UV Resistance**
Designed to withstand harsh environments, the profiles offer high resistance to corrosion and ultraviolet degradation, ensuring longevity in exterior applications.

