




TECHNICAL SPECIFICATIONS	
SASH WIDTH	54 mm
SASH LENGTH	94 mm
FRAME LENGTH	44 mm
GLASS THICKNESS	21 - 44 mm
MAX. SASH CARRYING CAPACITY	200 kg / 300-400 kg
INSULATION BRIDGE	24 mm

APPLICATION FEATURES	
HBSB MECHANISM	✓
FLYSCREEN	✓
45° AND 90° SASH JOINT	✓
40 & 50 MM THICKNESS OPTIONS IN MEDIUM SEAM	✓
INNER AND EXTERIOR FLOORING FACING SAFE	✓
EASE OF USE AND FUNCTIONALITY	✓
MONO RAIL FRAME	✓
3 TRACK FRAME	✓

- **Sash Carrying Capacity:**
200 kg standard / 300 - 400 kg with HBSB mechanism
- **Integrated Fly Screen:**
Fly screen design is seamlessly integrated into the system on all frame types
- **Sash Connection Options:**
45° and 90° corner joint alternatives available for sash assembly
- **High Durability and Smooth Operation:**
Stainless steel rail system combined with specially designed bearings ensures long-lasting performance and enhanced user comfort

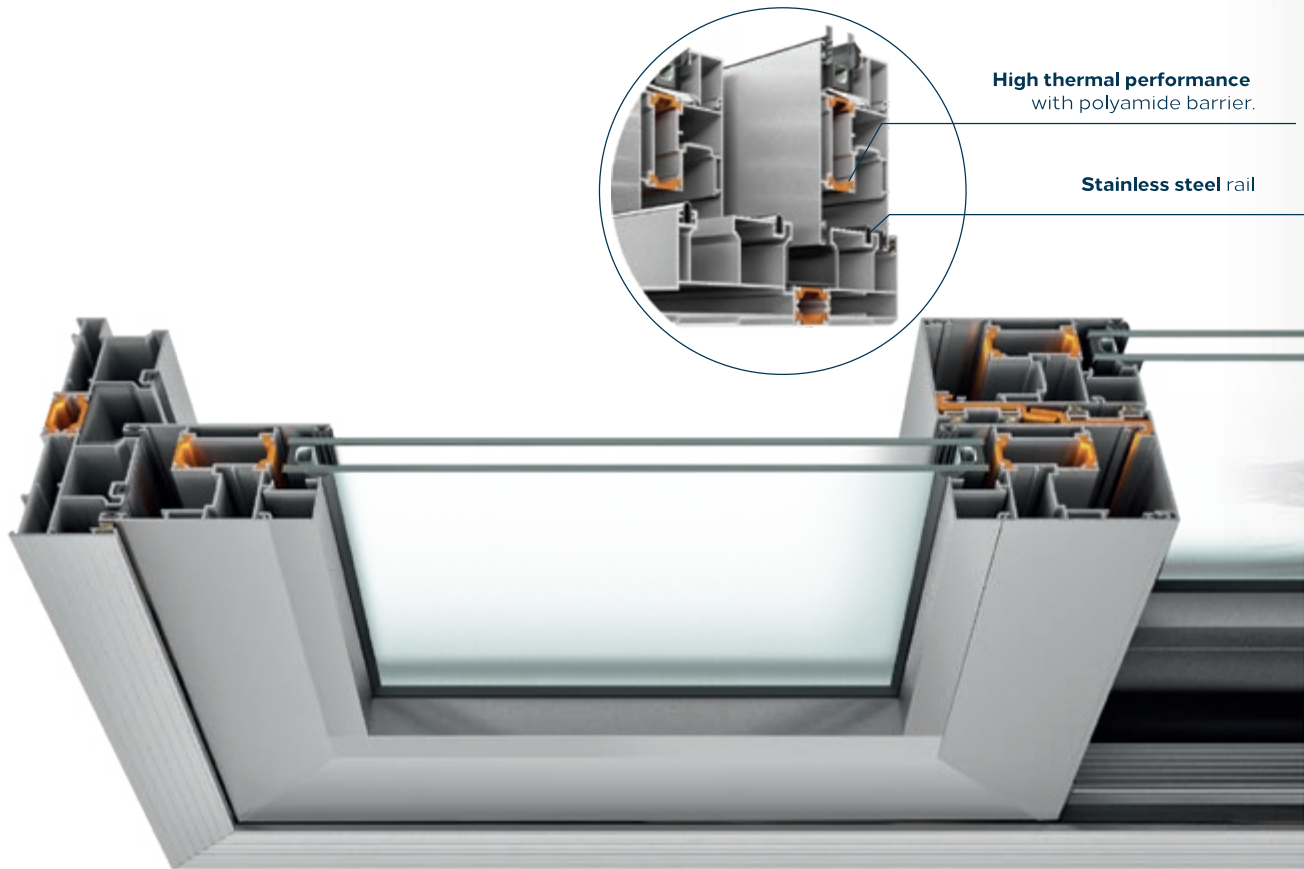

SOUND
PERFORMANCE



WATER
ISOLATION



EASE OF
INSTALLATION



FLY SCREEN
DESIGN

