



More Tracks.
More Possibilities.

3 + TRACKS

Multiple Track Options



INNOVATIVE
DESIGN



MINIMAL APPEARANCE
MAXIMUM VIEW



MAXIMUM
SAFETY



TECHNICAL SPECIFICATIONS

35,23 x 30,6 mm	INTERLOCKING SASH PROFILE
27,5 x 64,1 mm	LOCK-SIDE SASH PROFILE
95,5 x 17 mm	TRIPLE-TRACK BOTTOM FRAME PROFILE
95,5 x 19 mm	SIDE FRAME PROFILE
95,5 x 39 mm	TOP FRAME PROFILE

Flexible Track Configuration

Thanks to its specially designed top and side frame profiles, the system offers track options starting from three tracks, with the flexibility to add more tracks according to project requirements.

Project-Specific Panel Configuration


Additional frame profiles make it possible to achieve the required number of panels. Different panel widths and opening configurations can be arranged to suit the openings specified by the project.

Insulated Glass Compatibility


The insulated-glass sash profiles are compatible with 4+16+4 mm and 6+12+6 mm glazing configurations, providing solutions for a variety of project requirements

Single Glass Options

Single-glass applications using 8 mm or 10 mm glass can be achieved with single-glass adapter profiles.

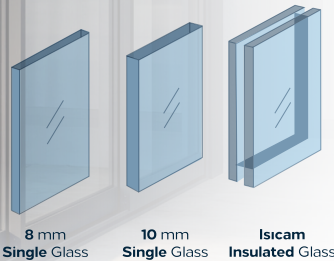

i Glass can be selected according to the required level of insulation and the intended application.

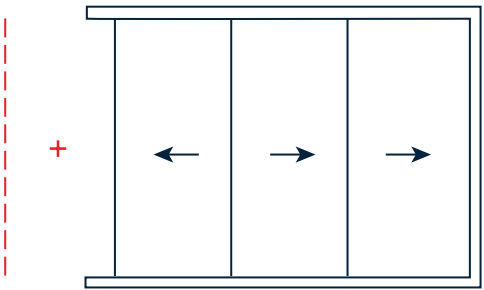

i Project-Specific Panel Configuration

SYSTEM FEATURES

- Expandable Number of Tracks ✓
- Project-Specific Panel Configuration ✓
- Compatible with Insulated and Single Glass ✓
- Alternative Panel Widths ✓
- Flexible Opening Options ✓